

T 2521 EN

Type 2405 Pressure Reducing Valve

Self-operated Pressure Regulators · ANSI version



Application

Pressure reducing valve for set points from **0.075 to 150 psi** · Nominal size **NPS ½ to 2**¹⁾ · Pressure rating **Class 125 to 300** · Suitable for gases at temperatures from **-5 to +140 °F** · **32 to 300 °F**²⁾

This regulator is used to control the pressure of flammable gases used as a source of energy, e.g. in boilers, driers, vaporizers, heat exchangers or industrial ovens. Alternatively, it can control the compressed air supply in process engineering applications.

An additional application of the regulator is the pressure control of inert gas used for inerting or blanketing reaction or storage tanks to protect the product in the tank from oxidation, explosion or escaping. To achieve an economical consumption of the inert gas, its pressure must be controlled to always remain slightly higher than atmospheric pressure while the tank is being filled or emptied.

Special features

- Low-maintenance regulators functioning as proportional or two-step controllers
- Compact regulator design providing excellent control accuracy
- Internal set point springs with set point adjustment using a nut on the actuator
- Spring-loaded, single-seated valve balanced by a balancing diaphragm
- External connection of a control line
- Meets strict fugitive emission requirements
- Minimum leakage class IV

Version

Pressure reducing valve with proportional control action

Valves in NPS ½ to 2 · Flanged connections · Soft-seated plug · Body made of cast iron, cast steel or cast stainless steel

Pressure reducing valve with two-step control mode

Valves in NPS 1½ and 2 · Flanged connections · Soft-seated plug · Body made of cast iron, cast steel or cast stainless steel

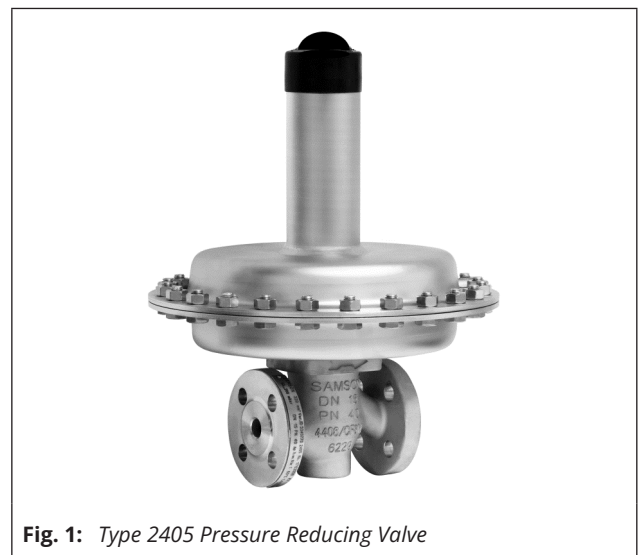


Fig. 1: Type 2405 Pressure Reducing Valve

Special versions

- FDA version³⁾
- NACE version for sour gas applications
- Version with force limiter (for higher pressures across the operating diaphragm)
- Actuator with seal and leakage line connection
- Version with connected control line. Pressure tapped directly at the valve body; optionally also with pressure gauge



¹⁾ NPS ½ and ¾ not in Class 125

²⁾ For unbalanced versions with FKM diaphragm and FKM soft seal

³⁾ This version is not suitable for direct contact with products manufactured in the food and pharmaceutical industries. It can only be used close to the product.

Principle of operation

The medium flows through the regulator in the direction indicated by the arrow. The position of the plug (3) determines the cross-sectional area of flow between the plug and the seat (2).

– Pressure reducing valve with proportional control action (see Fig. 3)

In the pressureless state (control line not connected and no pressure applied) the valve is opened by the force of the set point springs (27). The spring force is adjustable at the set point adjuster (30).

The downstream pressure p_2 to be controlled is tapped downstream of the regulator and transmitted over an external control line to the control line connection (9) on the actuator housing (20) where it is converted into a positioning force by the diaphragm plate (18) with operating diaphragm (21). The diaphragm moves the plug over the plug stem (4) depending on the force of the set point springs.

When the force resulting from the downstream pressure p_2 rises above the spring force adjusted at the set point springs, the valve closes proportionally to the change in pressure.

In the version with pressure balancing, the forces produced by the upstream and downstream pressures acting on the plug are eliminated by the balancing diaphragm (8). The plug is fully balanced.

– Pressure reducing valve with two-step control mode (see Fig. 2)

The regulator (nominal sizes NPS 1½ and 2, C_v 20 and 37 with set point ranges from 0.075 to 0.87 psi) operates as a two-step controller.

A differential pressure of at least 23.5 psi is required for troublefree operation.

In the idle state, the valve is closed when the pressure in the bottom actuator chamber is equal or higher than the set point. The set point is adjusted by tensioning the set point spring (27) at the set point adjuster (30).

The upstream pressure p_1 is routed through a hole in the plug stem to the chamber of the plug balancing unit above the balancing diaphragm (8).

The valve is pressure-balanced in this way.

The required closing force of the plug is generated by the compression spring (542) in the chamber.

If the downstream pressure p_2 being controlled drops below the lower switching point of the adjusted set point, the force created by the diaphragm (21) is lower than the force of the set point spring (27). This causes the diaphragm plate (18), which is fastened to the actuator stem (540), to be pushed down moving towards the plug. This results in a force being exerted on the tappet, which is part of the assembly (535) of the internal bypass valve.

The pressure in the balancing chamber is relieved to the downstream side.

The balancing pressure drops until it reaches the level of the downstream pressure p_2 . As a result, the upstream pressure exerted on the plug is able to fully open the valve opposing the force of the compression spring (542).

If the downstream pressure p_2 starts to rise again and reaches the upper switching point of the adjusted set point, the diaphragm plate (18) and actuator stem (540) with it are lifted. The internal bypass valve closes and the upstream pressure p_1 starts to build up again in the chamber of the plug balancing unit above the balancing diaphragm (8). The pressure-balanced state of the valve is restored and the compression spring (542) causes the plug to close.

The two-step control mode is determined by a switching accuracy of ≤ 0.022 psi between the upper and lower switching point.

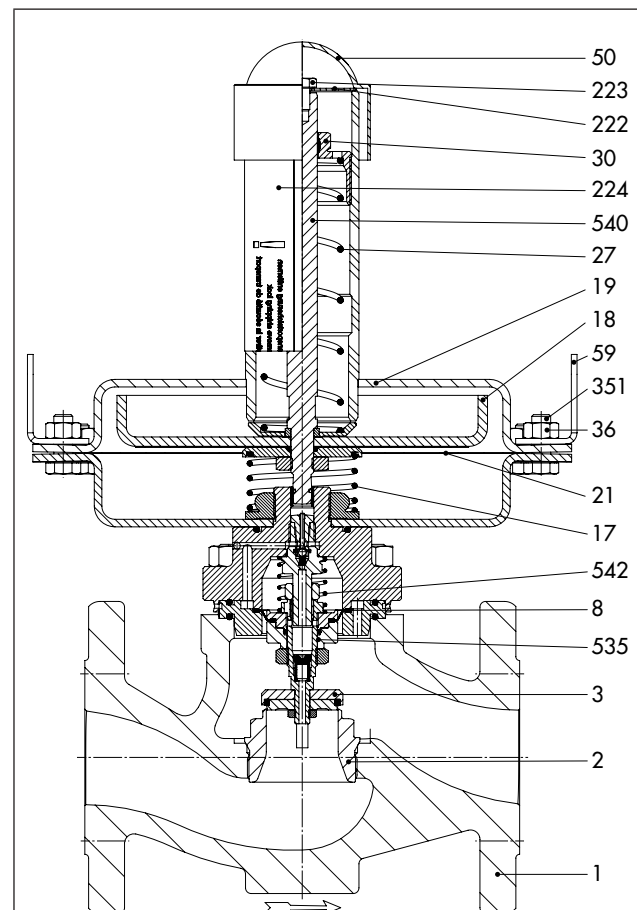


Fig. 2: Type 2405 Pressure Reducing Valve **with** pressure balancing · Nominal size NPS 1½ to 2 · Set points 0.075 to 0.87 psi · Flow-to-open (two-step control mode)

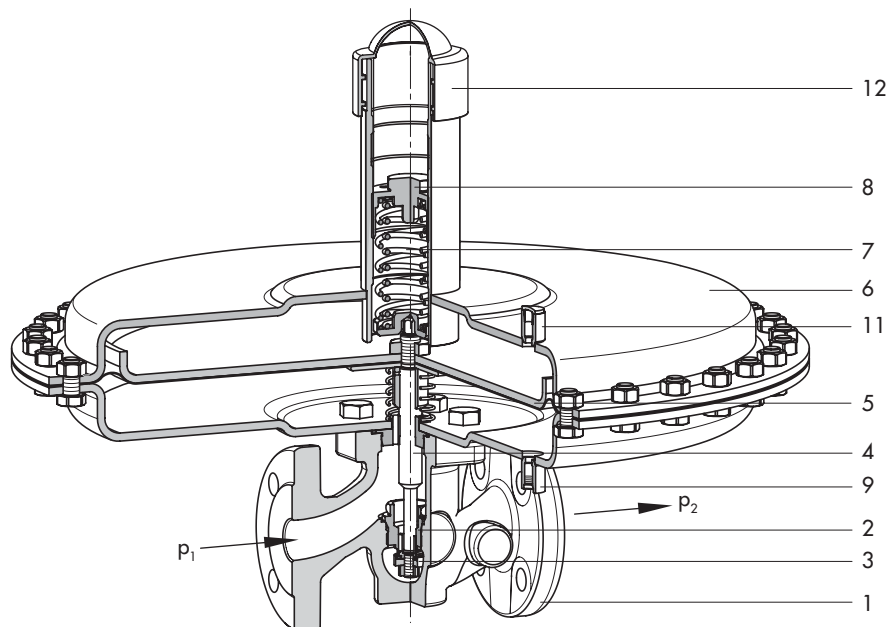


Fig. 3: Type 2405 Pressure Reducing Valve **without** pressure balancing · C_v 2 to 5 · Flow-to-open

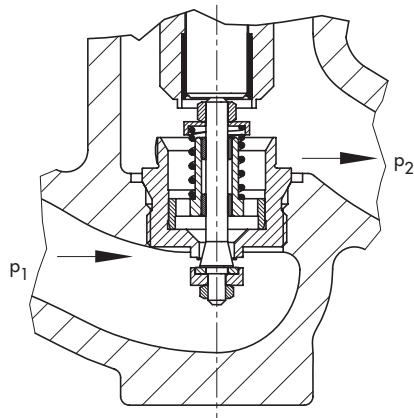


Fig. 4: Type 2405 Pressure Reducing Valve without pressure balancing · C_v 0.0 to 1.2 · Flow-to-close

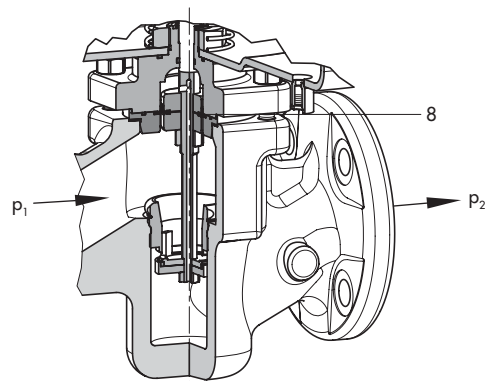


Fig. 5: Type 2405 Pressure Reducing Valve with pressure balancing · C_v 7.5 to 37

1	Valve body	19	Top actuator case	224	Label
2	Seat	20	Bottom actuator case	351	Screw
3	Plug	21	Operating diaphragm	535	Plug assembly (regulator with two-step control mode only)
4	Plug stem (regulator with proportional control action only)	27	Set point spring	540	Actuator stem
8	Balancing diaphragm	30	Set point adjuster (A/F 27)	542	Compression spring (closing spring of the plug)
9	Control line connection, G ¼ fitting	36	Nut		
11	Leakage line connection (special version), G ¼ fitting	50	Cap		
17	Compensation spring	59	Lifting eyelet (on the right and left-hand side of the actuator)		
18	Diaphragm plate	222	Shipping lock washer		
		223	Shipping lock screw (A/F 13)		

Table 1: Technical data

Nominal size		NPS ½	NPS ¾	NPS 1	NPS 1½	NPS 2
Pressure rating (valve)		Class 125, Class 150, Class 300				
C _v coefficients	Standard	5	7.5	9.4	23	37
	Reduced C _v coefficients	0.02 · 0.05 0.12 · 0.3 · 0.5 1.2 · 2 · 3	0.02 · 0.05 0.12 · 0.3 · 0.5 1.2 · 2 · 3 · 5	0.02 · 0.05 · 0.12 0.3 · 0.5 · 1.2 2 · 3 · 5 · 7.5	2 · 3 5 · 7.5 9.4 · 20	2 · 3 · 5 7.5 · 9.4 20 · 23
	Max. permissible differential pressure	150 psi · 175 psi ¹⁾				
Max. permissible temperature range (medium temperature)		-5 to +140 °F · (32 to 300 °F) ²⁾				
Leakage class according to ANSI/FCI 70-2		Soft-seated, minimum Class IV				
Conformity		CE				
Set point ranges		0.075 to 0.25 psi ⁵⁾ · 0.15 to 0.42 psi ⁵⁾ · 0.35 to 0.87 psi ⁵⁾ · 0.75 to 3 psi 1.5 to 8 psi · 3 to 15 psi · 10 to 37.5 psi · 30 to 75 psi · 65 to 145 psi				
Max. permissible pressure at operating diaphragm	186 in²	0.075 to 0.25 psi			0.075 to 0.25 psi 0.15 to 0.42 psi	
		7 psi				
	100 in²	0.15 to 0.42 psi · 0.35 to 0.87 psi			0.35 to 0.87 psi	
		14.5 psi				
	50 in²	0.75 to 3 psi · 1.5 to 8 psi				
		30 psi · 145 psi ³⁾				
	25 in²	3 to 15 psi				
		45 psi · 240 psi ³⁾				
12.5 in²	10 to 37.5 psi					
	75 psi · 240 psi ³⁾					
	6 in²	30 to 75 psi				
		145 psi · 240 psi ³⁾				
	65 to 145 psi					
	220 psi · 240 psi ³⁾					
Pressure balancing	C _v = 0.02 to 5	Without balancing diaphragm				
	C _v = 7.5 to 37	With balancing diaphragm				
Pressure tapping		External ⁴⁾				
Control line connection		G ¼ – with ¼ NPT adapter –				

¹⁾ Version with set points from 1.5 to 150 psi

²⁾ Unbalanced version with FKM diaphragm and FKM soft seal; not for FDA version

³⁾ Version with force limiter

⁴⁾ Special version for set point ranges 10 to 37.5 psi, 30 to 75 psi and 65 to 150 psi: Pressure tapping directly at the valve body (see photo in 'Special versions' on page 1)

⁵⁾ For the regulator version with two-step control mode only

Table 2: Materials · Material numbers according to ASTM and DIN EN

Valve body	Cast iron A126B, cast steel A216 WCC	Cast stainless steel A351 CF8M
Seat, plug and plug stem	316L	316L
Plug spring	1.4310 ¹⁾	
Seal	EPDM · FKM · NBR	
Balancing diaphragm	EPDM · FKM · NBR	
Actuator housing	1.0332	1.4301
Operating diaphragm	EPDM · FKM · NBR	

¹⁾ Only with C_v = 0.12 to 1.2

Table 3: Technical data · Pressure reducing valve with two-step control mode

Nominal size	NPS 1½	NPS 2
Pressure rating (valve)	Class 125, Class 150, Class 300	
C _v coefficients	23	37
Min. required differential pressure	23.2 psi	
Max. permissible differential pressure	150 psi	
Switching accuracy	≤0.022 psi	
Max. permissible temperature range (medium temperature)	-5 to +140 °F	
Leakage class according to IEC 60534-4	Soft-seated, minimum Class IV	
Conformity	CE	
Set point ranges	0.075 to 0.25 psi · 0.15 to 0.42 psi · 0.35 to 0.87 psi	
Max. perm. pressure at operating diaphragm with a set point range	0.075 to 0.25 psi	7 psi
	0.15 to 0.42 psi	
	0.35 to 0.87 psi	14.5 psi
Pressure balancing	With balancing diaphragm	
Pressure tapping	External	
Control line connection	G ¼ – with ¼ NPT adapter –	

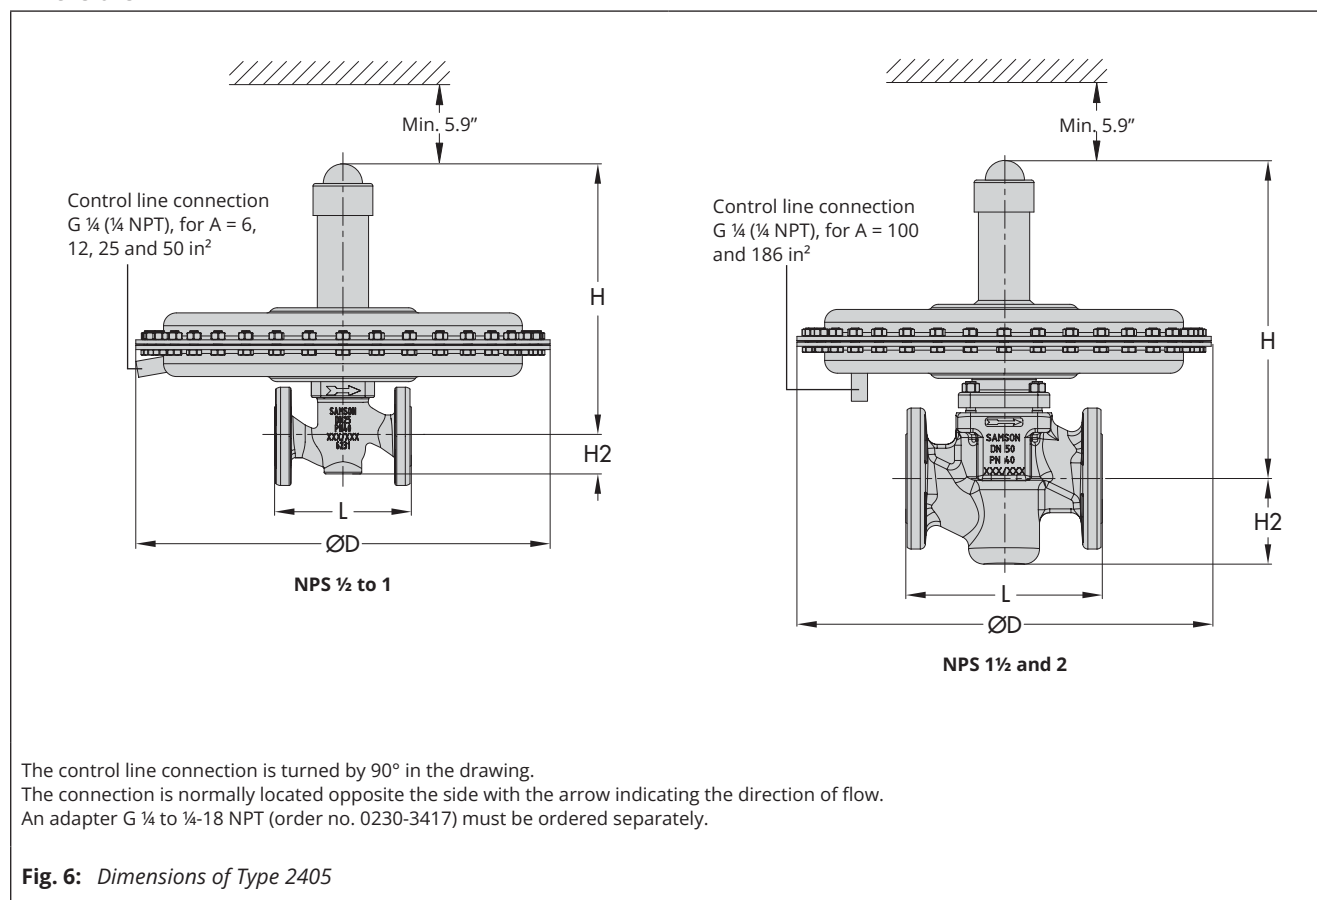
Dimensions

Table 4: Dimensions in inch and weights in lb

Nominal size			NPS ½	NPS ¾	NPS 1	NPS 1½	NPS 2	
Overall length L	Class 125	inch	–	–	7.3	8.8	10	
	Class 150	inch	7.3	7.3	7.3	8.8	10	
	Class 300	inch	7.5	7.6	7.8	9.3	10.5	
Height H2	Cast steel	inch	1.8			2.8		
	Forged steel	inch	2.1	–	2.8	3.7	3.9	
Set point range	0.075 to 0.25 psi	Height H	Without balancing	12.8"			14.6"	
			With balancing	13.9"			–	
		Actuator	ØD = 19.1", A = 186 in²					
	0.15 to 0.42 psi	Height H	Without balancing	12.6"			14.4"	
			With balancing	13.8"			–	
		Actuator	ØD = 15", A = 100 in²			ØD = 19.1", A = 186 in²		
	0.35 to 0.87 psi	Height H	Without balancing	12.6"			14.4"	
			With balancing	13.8"			–	
		Actuator	ØD = 11.2", A = 50 in²			ØD = 15", A = 100 in²		
	0.75 to 3 psi	Height H	Without balancing	12.6"			14.4"	
			With balancing	13.8"			14.6"	
		Actuator	ØD = 11.2", A = 50 in²					
	1.5 to 8 psi	Height H	Without balancing	12.6"			14.4"	
			With balancing	13.8"			14.6"	
		Actuator	ØD = 11.2", A = 50 in²					
	3 to 15 psi	Height H	Without balancing	12.6"			14.4"	
			With balancing	13.8"			14.6"	
		Actuator	ØD = 8.9", A = 25 in²					
	10 to 35 psi	Height H	Without balancing	13"			14.4"	
			With balancing	14"			14.6"	
		Actuator	ØD = 6.7", A = 12 in²					
	30 to 75 psi	Height H	Without balancing	13.2"			14.5"	
			With balancing	14.2"			14.7"	
		Actuator	ØD = 6.7", A = 6 in²					
	65 to 150 psi	Height H	Without balancing	17.2"			19.1"	
			With balancing	18.3"			19.3"	
		Actuator	ØD = 6.7", A = 6 in²					
Weight ¹⁾ in lb (approx.)								
Set point range	0.075 to 0.25 psi		61.7 lb			88.2 lb		
	0.15 to 0.42 psi		39.7 lb			88.2 lb		
	0.35 to 0.87 psi		30.9 lb			66.1 lb		
	0.75 to 3 psi		30.9 lb			57.3 lb		
	1.5 to 8 psi		30.9 lb			57.3 lb		
	3 to 15 psi		22 lb			48.5 lb		
	10 to 35 psi		17.6 lb			44.1 lb		
	30 to 75 psi		17.6 lb			44.1 lb		
65 to 150 psi		19.8 lb			46.3 lb			

¹⁾ Body made of A216 WCC and A351 CF8M: +10 %


Installation

The regulator is preferably to be installed in horizontal pipelines:

- Actuator housing on top, actuator facing upwards
- The direction of flow must match the direction indicated by the arrow on the body.
- In applications in which the blanketing gas can liquefy, condensate may form in the control line, causing damage to the regulator. To allow condensate to run back into the tank, install the control line with an approximate 10 % slope to the pressure tapping point at the tank.
- Distance between the pressure tapping point and regulator min. 6x NPS



In exceptional cases, the regulator can also be installed in vertical pipelines with the direction of flow from the top (see ► EB 2520 for more details).

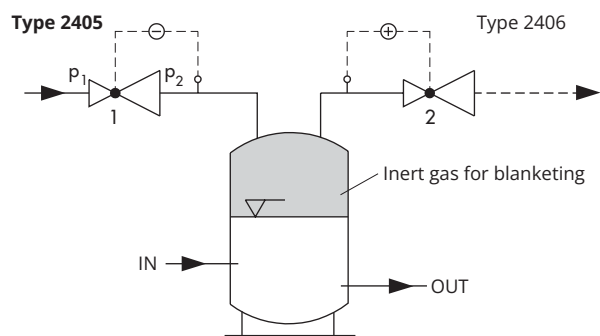

If the pressure p of the inert gas in the tank falls below the set point p_2 adjusted at the **Type 2405** Pressure Reducing Valve (1), it opens to allow more gas to enter the tank. The valve (1) closes again when the pressure p of the blanketing gas rises to the adjusted set point p_2 . If the pressure is too high, the inert gas is vented off over the Type 2406 Excess Pressure Valve (2).

Fig. 7: Sample application, Type 2405 used for tank blanketing

Ordering text

Type 2405 Pressure Reducing Valve

Nominal size NPS ..., set point range ... psi, C_v coefficient ..., body material ..., optionally, special version ...

Materials:

Plug sealing ..., balancing diaphragm ...,

Operating diaphragm ...

