


A Strong Combination

Type 5757-7 Electric Actuator with Process Controller
for heating applications based on outdoor
temperature




Benefits for you

Flow temperature control based on the outdoor temperature

- Configurable return flow temperature limitation
- Binary input to switch between operating modes
- External potentiometer to change the heating characteristic gradient or level
- Standard Pt 1000 sensors
- Integrated relay for pump control
- Slide switch to change between two different configurations
- Reversible direction of action for cooling applications

Flow temperature control based on the room temperature

- Configurable return flow temperature limitation
- Room control panel to switch between operating modes and change the set point
- Standard Pt 1000 sensors
- Integrated relay for pump control
- Slide switch to change between two different configurations
- Reversible direction of action for cooling applications

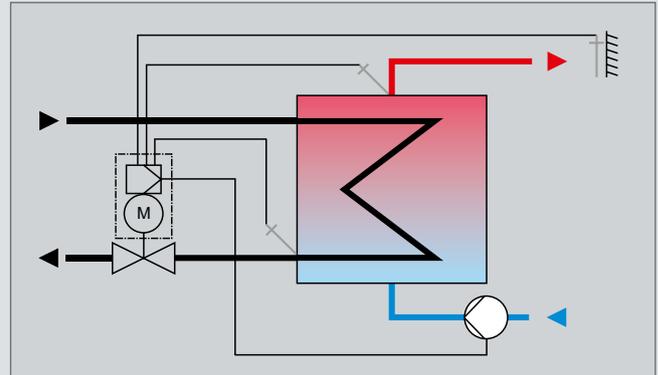

Flow temperature control based on the outdoor temperature with return flow temperature limitation and pump control

Options

- TROVIS-VIEW software for configuration, operation and diagnostics
- Memory pen for data exchange including data logging and diagnostics

