




Mash Temperature Control

TROVIS 5724-8 Electric Actuator with Process Controller in a compact unit with pump control for winemaking

- Control unit for constant temperature control of the mash
- Variable capacity tanks do not need to be opened
- Cooling capacity for tanks up to 330 liters
- High control accuracy
- Control panel with temperature display and operating keys



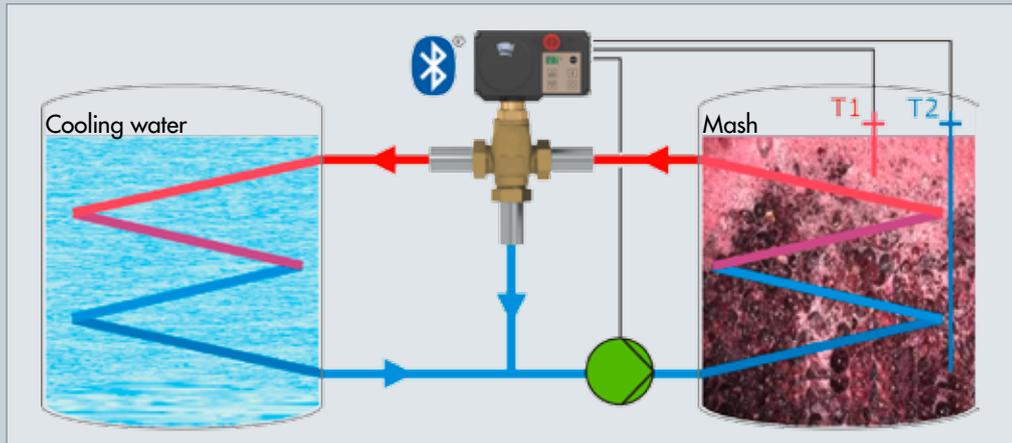

Fixed set point control with mean value calculation, pump control, and set point adjustment at the device



Stainless steel cooling coil

- Compact solution for constant temperature control of the mash
- Ready-wired unit including two stainless steel cooling coils
- Control panel with display to read operating values
- Set point adjustment and start/stop control sequence using the operating keys
- Pump control at the switching output of the electric actuator with process controller
- Integrated Bluetooth interface for connection to TROVIS-VIEW software
- Degree of protection IP 54

Options

- TROVIS-VIEW software for configuration and documentation (free download)
- Sensor accessories for ready-wired sensors (e.g. thermowells, mounting kit)